




# BEARING CORP.OF AMERICA

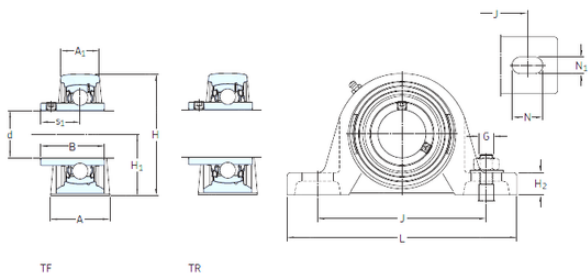

## skf SY 1/2 FM Ball bearing plummer block units

Bearing No. SY 1/2 FM

SY 1/2 FM Bearing 2D drawings and 3D CAD models

Bore Diameter	12,7 mm
d	12,7 mm
s1	22,1 mm
A	32 mm
A1	18 mm
B1	28,6 mm
H	56 mm
H1	30,2 mm
H2	14 mm
J	97 mm
L	127 mm
N	20,5 mm
N1	11,5 mm
Thread (G)	10
Weight	0,6 Kg
Basic dynamic load rating (C)	9,56 kN
Basic static load rating (C0)	4,75 kN
Fatigue load limit (Pu)	0,2
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.589
Product Group	M06110
Number of Mounting Holes	2



## BEARING CORP.OF AMERICA

Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Mounting Bolts	3/8 Inch
Relubricatable	Yes
Insert Part Number	YET 203-008
Seals	M Seal
Housing Configuration	1 Piece Solid
Inch - Metric	Inch
Other Features	Single Row   Standard Duty   Narrow Inner Race   Y Bearing
Long Description	2 Bolt Pillow Block; 1/2" Bore; 1-3/16" Base to Center Height; Eccentric Collar Mount; Ball Bearing; 3-15/32" Minimum Bolt Spacing; 4-3/16" Bolt Spacing Maximum; Relubricatable; Ca
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	SY 1/2 FM
Weight / LBS	1.3
Nominal Bolt Center to Center	3.8 Inch   97 Millimeter
Bore	0.5 Inch   12.7 Millimeter
Bolt Spacing Maximum	4.188 Inch   106.375 Millimeter
Actual Bolt Center to	0 Inch   0 Millimeter



## BEARING CORP.OF AMERICA

Center	
Length Thru Bore	1.125 Inch   28.58 Millimeter
Base to Center Height	1.188 Inch   30.175 Millimeter
Bolt Spacing Minimum	3.469 Inch   88.113Millimeter
Housing material	Cast iron
A <sub>1</sub>	18 mm
B <sub>1</sub>	28.6 mm
H <sub>1</sub>	30.2 mm
H <sub>2</sub>	14 mm
J max.	106 mm
J min.	88 mm
N <sub>1</sub>	11.5 mm
s <sub>1</sub>	22.1 mm
R <sub>G</sub>	1/4-28 UNF
R <sub>1</sub>	1 mm
R	45 °
D <sub>N</sub>	6.5 mm
SW <sub>N</sub>	7 mm
G <sub>N</sub>	1/4-28 SAE-LT
J <sub>6</sub>	118 mm
J <sub>7</sub>	11.5 mm
N <sub>4</sub>	2 mm
Basic dynamic load rating C	9.56 kN
Basic static load rating C <sub>0</sub>	4.75 kN
Fatigue load limit P <sub>u</sub>	0.2 kN
Limiting speed	9500 r/min
Mass bearing unit	0.52 kg
Thread grub screw G <sub>2</sub>	1/4-28 UNF
Hexagonal key size for grub screw N	3.175 mm



## BEARING CORP.OF AMERICA

Recommended tightening torque for grub screw	4 N · m
Recommended diameter for attachment bolts, mm G	10 mm
Recommended diameter for attachment bolts, inch G	0.375 in